



Europäisches Patentamt
Eur pean Patent Office
Office européen des brevets



(11) Publication number : **0 455 444 A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : 91303847.7

(51) Int. Cl.⁶ : **H04N 5/335, H04N 5/232,
G02B 27/64**

(22) Date of filing : 29.04.91

(30) Priority : 29.04.90 JP 112663/90
29.04.90 JP 112664/90

(43) Date of publication of application :
06.11.91 Bulletin 91/45

(84) Designated Contracting States :
DE FR GB

(71) Applicant : **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko, Ohta-ku
Tokyo (JP)

(72) Inventor : Tokumitsu, Jun, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)
Inventor : Sekine, Masayoshi, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)

Inventor : Kondo, Toshiaki, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)

Inventor : Takahashi, Koji, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)

Inventor : Harigaya, Isao, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)

Inventor : Yoshii, Minoru, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)

Inventor : Suda, Shigeyuki, c/o **CANON**
KABUSHIKI KAISHA
30-2, 3-chome, Shimomaruko
Ohta-ku, Tokyo (JP)


(74) Representative : Beresford, Keith Denis Lewis
et al
BERESFORD & Co. 2-5 Warwick Court High
Holborn
London WC1R 5DJ (GB)

(54) Movement detection device and focus detection apparatus using such device.

(57) A movement detection device for compensating for movement of an image by detecting the movement of the image comprises movement detection means (7) for detecting the movement of the image, a correction device (8) for correcting the movement of the image based on an output of the detection means, and a filter (10) for performing a filtering processing which compensates for degradation of resolution due to the movement of the image. And a focus detection apparatus detects a focus by extracting a signal component varying with a focusing state from an image pick-up signal which has a movement component of an image corrected by the movement correction device.

EP 0 455 444 A1

FIG. 1

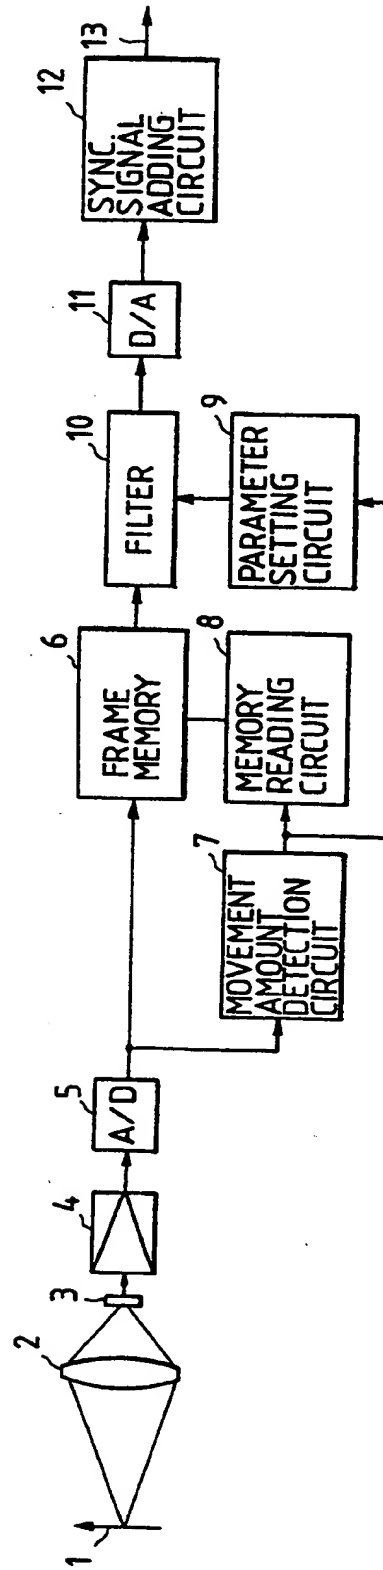

BACKGROUND OF THE INVENTION**Field of the Invention**

5 The present invention relates to a movement detection device suitable for use with a vibration-proof device for compensating for the movement of image being picked-up by the camera due to trembling of hand or other vibrations, an automatic tracking apparatus for tracking a moving object, and an automatic focus detection apparatus for detecting the focusing state from a pick-up signal.

Related Background Art

10 Recently, image instruments such as a video camera or electronic camera have been remarkably developed in which to enable a more reliable and appropriate photographing operation, a movement correction device has been adopted, which allows the photographing of higher quality image without fluctuation by correcting the movement of image due to trembling of hand or other vibrations.

15 The movement correction method for the movement correction device involves a mechanical correction method of using the inertia maintaining the axes of lens and image sensor fixed for the rotation of camera body, an optical correction method of using the optical member such as a variable apex angle prism, and an image processing correction method for making the correction by moving a screen with the image processing.

20 According to the mechanical correction method, a special structure for supporting the lens and a pick-up system is required, and according to the optical correction method, a special optical member such as variable apex prism as described is required, while in the image processing correction method, no special mechanical structure and optical members are necessary, in which it has a feature of enabling the movement correction only with the signal processing in the electrical circuit, and is expected to be widely used in the future.

25 However, the movement correction device with the above-mentioned conventional image processing method has a following disadvantage, compared with the mechanical or optical device.

30 That is, in performing the movement correction with the image processing method, an image has some movement at the pick-up stage with an image sensor or pick-up tube, whereby in the post-processing, the movement of image within a screen is removed by shifting the image in accordance with the amount of image movement.

35 Thus, as the image obtained in the pick-up stage yields some unfocused portion, final resolution of image is low even if the movement of image is corrected in the post-processing, so that a poor quality of image is given.

40 Recently, in video instruments such as a video camera or electronic camera, an automatic focusing adjustment apparatus for adjusting the focus by detecting the focusing state from a pick-up signal has been adopted, but as above described, the movement of image may reduce a high frequency component varied with the focusing state from the pick-up signal, thereby decreasing the sharpness, and degrading the performance of automatic focusing adjustment apparatus, whereby there is a risk of malfunction and so it is quite important to detect and correct the movement of image in the processing using the pick-up signal.

SUMMARY OF THE INVENTION

45 The present invention is intended to resolve the above problems, and it is a first object to provide a movement detection device which can compensate for the degradation of resolution due to the movement of image.

50 A second object of the present invention is to provide a movement detection device capable of providing an image without fluctuation or deflection and having high resolution, with the movement corrected, in which it can compensate for the degradation of resolution with the movement of image by means of the filtering.

55 A third object of the present invention is to provide a movement detection device capable of providing a high quality image with its movement corrected by performing the filtering adaptively by the use of the movement vector of image obtained from a movement amount detection device especially useful for the correction of movement.

60 A fourth object of the present invention is to provide a movement detection device having an effect of providing a high quality image by compensating for the degradation of image quality resulting from the movement of image by means of the filtering, and increasing the resolution of output image for a movement correction device.

65 A fifth object of the present invention is to provide a movement detection device with which the quality of image can be made excellent, almost optimal, without increase of the cost, by changing adaptively the characteristics of filter used in the filtering processing, particularly based on a movement vector to be obtained for the

correction of movement.

To achieve such objects, a preferred embodiment of the present invention discloses a movement detection device for detecting the movement of an image and compensating for the movement of the image, comprising movement detection means for detecting a movement of an image, correction means for correcting the movement of the image based on an output of said detection means, and filter means for performing a filtering processing compensating for degradation of resolution with the movement of the image.

A sixth object of the present invention is to provide a focus detection apparatus capable of making a high precision focus detection while avoiding the decrease of accuracy due to the movement of image, wherein the movement of image is detected and the focus detection is made using a signal for which the degradation of resolution with the movement of the image has been compensated.

A seventh object of the present invention is to provide a stable focus detection apparatus with high precision at all times, in which it is not subject to the influence of camera vibration or object movement because it is possible to prevent the degradation of accuracy in focus detection means caused by a signal decreasing in accordance with the focusing state, such as uncleanness of edge portion or decrease of the high frequency component owing to the movement of the image.

To accomplish such objects, a preferred embodiment of the present invention discloses a focus detection apparatus for detecting a focusing state based on a pick-up signal output from pick-up means, comprising movement detection means for detecting a movement of an image from the pick-up signal, movement correction means for correcting the movement of the image based on an output of the movement detection means, and focus detection means for performing focus detection by extracting a signal component varying with the focusing state from the pick-up signal having its movement component of image corrected by the movement correction means.

Additional objects and feature of the present invention will become apparent from the following description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a first example of a movement detection device according to the present invention.

Fig. 2 is a view showing the movement of image.

Fig. 3 is a view showing the movement of optical image.

Figs. 4A to 4C are characteristic views showing the filter characteristic for filtering.

Fig. 5 is a characteristic view showing the inverse filter characteristic.

Fig. 6 is a characteristic view showing the Wiener filter characteristic.

Fig. 7 is a block diagram showing a second example of the present invention.

Fig. 8 is a view showing images containing a plurality of movements.

Fig. 9 is a view showing area decision results.

Fig. 10 is a block diagram showing a third example of a movement correction device according to the present invention.

Fig. 11 is a view showing the movement of image.

Fig. 12 is a view showing the movement of optical system.

Fig. 13 is a view showing a point image distribution function with the movement of image.

Fig. 14 is a view showing the correction of edge width.

Fig. 15 is a block diagram showing a fourth example of the present invention.

Figs. 16A and 16B are schematic graphs showing a focus detection method with a conventional image processing.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

An embodiment of a movement correction device according to the present invention will be described in detail with reference to the drawings.

Fig. 1 is a block diagram showing a first embodiment of movement correction device according to the present invention.

In this figure, 1 is an object, 2 is a pick-up lens, and 3 is a pick-up element or pick-up tube such as CCD for outputting a pick-up signal by photoelectrically converting an object image formed on a pick-up plane by the pick-up lens 2. 4 is an amplifier for amplifying the pick-up signal output from the pick-up element 3 to a predetermined level, 5 is an A/D converter for converting the input analog pick-up signal to the digital signal, 6 is a frame memory for storing the image signal converted into the digital signal by the A/D converter 5, and 7 is

a movement amount detection circuit for obtaining a movement vector from the image signal which has been converted from analog to digital form. Exemplary of a method of calculating the movement vector is that as used in a so-called representative point matching method or gradient method. 8 is a memory reading circuit for reading an image signal from the frame memory 6 by generating a read address and executing the reading.

9 is a parameter setting circuit for setting parameters for prevention of image degradation, and 10 is a filter.

11 is a D/A converter for converting the digital image signal passing through the filter 10 to the analog image signal, 12 is a synchronism signal adding circuit for adding a synchronism signal to the image signal, and 13 is an output video signal.

The pick-up lens 2 forms an image of object 1 on the pick-up plane of pick-up element 3. The image on the pick-up element 3 involves the movement owing to the movement of the lens 2, pick-up element 3 or object 1. The image signal output from the pick-up element 3 is amplified by the amplifier 4, converted to the digital signal by the A/D converter 5, and then stored in the frame memory 6 temporarily.

The digital image signal which is an output of A/D converter 5 is also transferred to the movement amount detection circuit 7. Movement vector data obtained by the movement amount detection circuit 7 are transferred to the memory reading circuit 8 and the parameter setting circuit 9.

The movement detection circuit 7 requires data of screen one frame or field before the current screen for calculating the amount of movement, thereby requiring a frame memory. This frame memory may be constructed in common with the frame memory 6, or separately provided.

The memory reading circuit 8 creates the address for reading the frame memory 6 multiplied by the offset based on movement vector data. Thereby, data read from the frame memory 6 are read out in such a way so as to move data almost reversely to the movement of image, so that the movement of image can be corrected. That is, the correction of image deflection can be achieved on the memory.

The parameter setting circuit 9 determines parameters such as filter coefficients based on the movement vector obtained from the movement amount detection circuit 7, and sends them to the filter 10. The filter 10 filters the image signal having corrected movement read from the frame memory 6, so as to reduce the unfocused part resulting from the movement of image on the pick-up element 3, i.e., the degradation of resolution.

Also, the filter 10 has the characteristics of a high-pass filter and a band-pass filter as will be described later.

The image signal output from the filter 10 is converted to the analog signal by the D/A converter 11, synthesized with a synchronism signal by the synchronism signal adding circuit 12, and output as the video signal 13.

The improvement of resolution with the filtering will be described in the following.

Fig. 2 is a plan view showing the movement of image.

21 is an output screen. The output screen 21 has a fixed coordinate system which is useful for the reference to perform the processing such as the vibration isolation. Here, a monitor display screen can be assumed, for example.

22 is a previous image, and 23 is a current image. 24 is a movement vector when the previous image 22 moves to the current image 23.

In the output screen 21, a video signal 13 of Fig. 1 is displayed. For example, an image displayed with trembling of hand shows the movement from previous image 22 to current image 23 if time has passed from one clock to another when the object 1 is stationary.

With the movement correction method in the image processing, the movement correction is performed in such a manner that the movement vector 24 is calculated in the movement amount detection circuit 7, data is shifted by the amount of movement vector 24 on the output screen 21 when data of current image 23 is read from the frame memory 6, and the offset is added to the read address so that current image 23 can be superimposed almost on previous image 22.

As current image 23 involves the movement, the value of each pixel is integrated in a direction of movement vector 24. Accordingly, in practice, current image 23 of Fig. 2 only shows approximately a gravitational center position of sides of each pattern.

Fig. 3 is a front view showing the movement of optical system. In the same figure, 31 is one cell when the pick-up element is a solid pick-up element such as CCD. For the convenience of explanation, it is assumed that the movement direction of image coincides with a direction of array for one cell in the pick-up element 3. The pick-up element 3 converts a pattern of optical image thereon photoelectrically during a predetermined period of exposure. 32 is an optical image at the start of exposure, and 33 is an optical image at the termination of exposure. The optical image 32 at the start of exposure is moved to the optical image 33 at the termination of exposure because the image moves during exposure as shown in Fig. 2.

The movement vector 24 as shown in Fig. 3 indicates the movement between the optical image 32 at the start of exposure and the optical image 33 at the termination of exposure. This is almost the same as that of

Fig. 2, but more strictly, slightly different. That is, the movement vector as shown in Fig. 2 is one taken at nearly intermediate times of respective exposure periods for two images. On the contrary, the movement vector as shown in Fig. 3 is one taken for an image of interest from the start of exposure to the termination of exposure. Accordingly, when the amount of image movement changes abruptly, both movement vectors will have different values. Generally, both of the values can be almost the same, but the movement vector 24 as shown in Fig. 3 may be used after some slight correction when required in the parameter setting circuit 9, because the movement vector 24 obtained from the movement detection circuit 7 is one as shown in Fig. 2.

Figs. 4A-4C are graphs showing the filter characteristics for the filtering useful in the filter 10 for correcting the degradation of image.

In Fig. 4A, 41 is a point image distribution function with the movement of image. The axis of abscissa x in the spatial coordinate system is taken along the movement direction. The length of the movement vector 24 is assumed to be a . Then, the image generated by one point of object 1 moves during exposure period, approximately following the point image distribution function 41.

Representing that function as $h(x)$,

$$h(x) = \text{Rect}(x/a) \quad (1)$$

42 in Fig. 4B is a frequency characteristic showing the degradation of image.

Representing the frequency as f and the frequency characteristic 42 as $H(f)$,

$$H(f) = (\sin \pi a f) / \pi f \quad (2)$$

because $H(f)$ is a Fourier transform of the point image distribution function $h(x)$.

43 in Fig. 4C is a frequency characteristic of filter, and representing it as $P(f)$,

$$P(f) = 1/H(f)$$

$$= \pi f / (\sin \pi a f)$$

$$\dots (3)$$

Such a filter is called as an inverse filter.

That is, $H(f) \cdot P(f) = 1$, which means that the filtering of $P(f)$ can compensate for the degradation of image with $H(f)$.

In the filter 10 of Fig. 1, by filtering with this filter, the resolution of output video signal 13 is enhanced and excellent quality of image can be obtained. However, the inverse filter can be realized only approximately because it has infinite value at the frequency where the Fourier transform $H(f)$ is zero. And the frequency range can be a range where the frequency spectrum exists.

As clearly seen from Figs. 4A-4C and expressions (2), (3), the characteristic of degradation $H(f)$ and the characteristic of compensation filter $P(f)$ contain the size a of movement vector 24 as a parameter. The x -axis and f -axis are each taken along the direction of movement vector 24, which reveals that $P(f)$ depends on the size and direction of movement vector 24.

Accordingly, it is desirable that the filter 10 has its filter changed adaptively depending on the movement vector 24.

The filter 10 has two methods of performing the filtering processing. One of them is the filtering on the axis of frequency, in which the Fourier transform is taken of the image signal read out from the frame memory 6 with FFT (Fast Fourier Transform), which is then multiplied by the inverse filter $P(f)$, and the inverse Fourier transform is taken so that filtered image signal is obtained.

Another method is the filtering on the axis of time, performed in such a way that the impulse response is obtained by the inverse Fourier transformation of inverse filter $P(f)$, and convoluted to image signal from the frame memory 6 so that filtered output can be obtained.

When the inverse filter is realized with the convolution in the axis of time, an impulse response $S(x)$ of filter in the following expression can be used.

$$S(x) = K \delta'(x) * \left[\sum_{K=-\infty}^{+\infty} \delta(x - (2K-1)a/2) \text{sign}(x) \right] \dots (4)$$

Where K is a proportional constant, $\delta(x)$ is a delta function, and $\delta'(x)$ is a derivative of the delta function. And $*$ is a symbol indicating the convolution, and $\text{sign}(x)$ indicates a sign such that

$$\text{sign}(x) = \begin{cases} 1 & x > 0 \\ 0 & x = 0 \\ -1 & x < 0 \end{cases}$$

Note that the expression (4) is obtained by taking the Fourier transform of expression (3) using the delta function.

Fig. 5 is a graph showing the impulse response of inverse filter.

51 is an impulse response of the inverse filter, representing the expression (4).

The expression (4) must be truncated midway because it continues infinitely in the direction of x-axis. Therefore, it is desirable to use that function in the filtering processing after multiplication of the window function such as a hamming window.

In the inverse filter, the frequency area where the image information is almost lost with the degradation of image, i.e., where the value of frequency characteristic 42 is zero, and the high frequency area where there is only a few image information by nature may be given the characteristic of a large gain so that the output image has often a poor S/N ratio. Therefore, in the filter 10, the Wiener filter can be substituted.

The frequency characteristic of the Wiener filter $R(f)$ can be represented in the following expression.

$$R(f) = \frac{H^*(f)}{|H(f)|^2 + \Phi_n(f) / \Phi_s(f)} \quad \dots (5)$$

25

Where $\Phi_n(f)$ and $\Phi_s(f)$ indicate the power spectrum of noise and image signal, respectively, and $*$ indicates the complex conjugate.

Here, as it is difficult to obtain $\Phi_n(f)$ and $\Phi_s(f)$ correctly, $\Phi_n(f)$ is set to be constant by assuming the white noise, and $\Phi_s(f)$ is set to be the Gaussian type. Or they can be predetermined with the assumption that $\Phi_n(f)/\Phi_s(f)$ is constant over all frequencies.

In the Wiener filter, at the frequency where the signal component is sufficiently larger than the noise component, the value is almost the same as that of inverse filter, or conversely, it is close to zero at the frequency where the noise component is larger than the signal component.

Fig. 6 is a graph showing the frequency characteristic of Wiener filter. 61 is a frequency characteristic of Wiener filter. Compared with the frequency characteristic 43 of inverse filter, it can be seen that the gain is smaller at the frequency area with the poor SN ratio. And in the Wiener filter, like the inverse filter, it is desirable that the characteristic may be adaptively change depending on the movement vector 24.

Various filter characteristics of the filter 10 have generally the characteristic of a high-pass filter or band-pass filter.

Fig. 7 is a block diagram showing a second embodiment of the present invention.

The second embodiment shows a device which is effective when there are moving area and stationary area in an image, and further when the moving area is separated into a plurality of regions which have different movement vectors.

71 is an output of the movement amount detection circuit 7, i.e., the movement vector for each block or pixel within a screen. 72 is an area discrimination circuit, 73 is its output, i.e., an address offset signal, 74 and 75 are other outputs of the area discrimination circuit 72, i.e., the area signal and movement vector within area, respectively. 76 is a switch for sending the input signal to either of two output lines. 77 is an output video signal being processed for each area.

The stages where the input image signal is converted from analog to digital form, stored into the frame memory 6, and transferred to the movement amount detection circuit 7 are the same as in the first embodiment.

The movement amount detection circuit 7 transfers the movement vector 71 to the area discrimination circuit 72.

The area discrimination circuit 72 divides the screen into the stationary area and a plurality of moving areas having different movement vectors, based on the movement vector 71. The area discrimination circuit 72 selects a desired area of divided areas, and sends the movement vector of the selected area as an address offset signal 73 to the memory reading circuit 8. The memory reading circuit 8 reads the image signal from the frame memory 6 by offsetting the address, based on the received signal. Thereby, the entire screen is shifted.

The area discrimination circuit 72 sends the area signal 74 and the movement vector 75 within area to the parameter setting circuit 9, and the parameter setting circuit 9 sets the filter of different characteristic for each area to the filter 10. The area signal 74 is also sent to the switch 76, which sends the image signal from the frame memory 76 to the D/A converter 11 for the stationary area or to the filter 10 for the moving area. The output of filter 10 is subsequently sent to the D/A converter 11. That is, only for the moving area, the filtering processing is performed.

Note that the switch 76 can be integrated into the filter to by using a filter which allows the transmission of whole frequency band, if the stationary area is considered as a special case in the filter 10.

The analog signal output of the D/A converter 11 has a synchronism signal added by the synchronism signal adding circuit 12, and sent out as the output video signal 77 being processed for each area.

Fig. 8 is a plan view showing images containing a plurality of movements.

In this figure, 81 is an output screen which corresponds to a monitor display screen.

82 and 83 are first and second images of previous screen, respectively. 84 and 85 are first and second images of current screen, respectively. 86 is a background image, composed of small squares arranged in Fig. 8.

In transferring from previous screen to current screen, the first and second images 82, 83 of previous screen are moved to the first and second images 84, 85 of current screen on the output screen 81, respectively. However, the moving directions and sizes of two images are different. The background image 86 is not moved herein, i.e., coincident between previous screen and current screen.

Fig. 9 is a plan view showing the area discrimination result.

91 and 92 are first and second moving areas, respectively. 93 and 94 are the movement vectors within areas of the moving areas 91, 92. 95 is a stationary area.

The area discrimination circuit 72 of Fig. 7 performs the area division and the calculation of movement vector within area as shown in Fig. 9. That is, the first and second moving areas 91, 92 and the stationary area 95 are divided, and the movement vectors 93, 94 within areas are obtained for the first and second moving areas 91, 92.

When the device as shown in Fig. 7 is a tracking device, the tracking of specified image is performed. If it is assumed that the second image 83 is tracked in the current screen, the area discrimination circuit 72 sends the movement vector 94 within area of the second moving area 92 to the memory reading circuit as an address offset signal 73. At this time, as a result of shifting of the image due to the offset applied in reading the image signal from the frame memory 6, the second image 84 of current screen is displayed on the same place as the first image 83 of previous screen on the output screen 81. The images of other areas are shifted.

The switch 76 sends the image signal of the first and second moving areas 91, 92 to the filter 10, and that of the stationary area 95 directly to the D/A converter.

The filter 10 has its filter set with different characteristic by the parameter setting circuit 9, depending on the movement vectors 93, 94 within areas, for the images of the first and second moving areas 91, 92, in order to perform the filtering processing. The settings of filter and parameters used in the filter 10 are the same as in the first embodiment.

As above described, the movement detection device of the present invention can compensate for the degradation of image quality resulting from the movement of image with the filtering processing, so that there is an effect of increasing the resolution of output image with the movement correction device, thereby providing a high quality image.

Further, the filter characteristic useful for the filtering processing has such an effect that the image quality is made excellent, nearly optimal, by changing it adaptively based on the movement vector to be obtained especially for the movement correction, and without increasing the cost.

Next, to accomplish the sixth and seventh objects of the present invention, an embodiment in which the movement detection device is applied to a focus detection apparatus to improve the focus detection accuracy will be described.

Recently, image equipments such as a video camera or electronic camera have been remarkably developed, and it is requisite for its function to have an automatic focus adjustment device in the respect of operativity.

By the way, for the type of implementing the focus detection device, there are provided a device of the passive type in which the focusing signal is obtained by taking the correlation of image picked up by a twin-lens optical system, or an automatic focus adjustment device of the active type in which the focusing is judged from a position of spot generated by the reflected light flux by radiating the infrared light onto an object.

On the other hand, in the pick-up device such as a television camera for obtaining the image signal, a focus detection device has been developed in which the focus detection is performed by carrying out the image processing of image signal. In such device using the image processing, the signal for detecting the focusing state

is obtained from the image signal, whereby there is a feature that the focus detection is allowed irrespective of the distance from an object, without special element or circuit for making the infrared projection and with high precision, so that the development has been rapidly progressed.

5 Figs. 16A-16B are views for explaining an embodiment of focus detection method with a conventional image processing, illustrating the intensity distribution for the edge portion of an object image in the unfocused and focused states, in which Fig. 16A shows the unfocused state and Fig. 16B shows the focused state.

In Fig. 16A, EO shows an intensity distribution of the edge portion for an object image in the unfocused state, with a vague distribution due to the unfocused condition and a large width of edge portion.

10 Also, in Fig. 16B, EI shows an intensity distribution of the edge portion for an object image in the focusing state and at the same place as for the intensity distribution EO of unfocused edge portion. In the focusing state, it shows a narrow and steeply rising up edge.

Accordingly, the width of edge portion for object image is detected, and the focusing and unfocusing are judged from its edge width. That is, the focusing can be judged by making use of the property of narrow edge width at the focusing.

15 The edge intensity distribution EO in the unfocused state is a distribution of the edge portion detected from the image signal, where the edge width is represented by the following expression.

$$\ell_1 = d_1 / (dl_1(x)/dx) \quad (6)$$

20 Where d_1 indicates an intensity difference of edge portion. $l_1(x)$ is a function for representing the intensity distribution of edge in the unfocused state, whereby $dl_1(x)/dx$ indicates a slope of edge. This slope of edge can be used by taking the average of slopes of focusing in a range from a portion where edge rises up to a portion where it becomes flat again.

Also, at the focusing, the width of edge ℓ_2 can be calculated from the intensity distribution EI for the focusing, using the following expression.

$$\ell_2 = d_2 / (dl_2(x)/dx) \quad (7)$$

25 Where d_2 is an intensity difference of edge portion, $l_2(x)$ is a function for representing the intensity distribution EI of edge at the focusing, and $dl_2(x)/dx$ is a slope of edge. d_2 has almost the same value as d_1 , and $dl_2(x)/dx$ is larger than $dl_1(x)/dx$.

Accordingly, since ℓ_2 is a smaller value than ℓ_1 , it can be seen that the edge width becomes smaller and the focusing has been adjusted.

30 In this way, generally, a method in which the edge width is calculated from a density difference and a slope of edge portion, and the state is judged nearer to the focusing if the value is smaller is practiced as one method of making the focus detection with the image processing.

35 However, in the above-mentioned focus detection device, when an image has the movement, i.e., when an object is moving, or when the whole screen has shifted as a result of trembling of hand and panning, the image becomes unfocused due to its movement, whereby there is a disadvantage that the width of edge is widened due to the movement, and correct detection of focus can not be made.

40 This embodiment has been made to resolve the above-mentioned problems, characterized by focus detection apparatus comprising movement detection means for detecting a movement of an image from the pick-up signal, movement correction means for correcting the movement of the image based on the output of the detection means, and focus detection means for performing the focus detection by extracting a signal component varying with the focusing state from the pick-up signal having its movement component of image corrected by the movement correction means.

45 Thereby, a high precision focus detection apparatus can be realized without decreasing its precision owing to the movement of image, in which the focus detection can be performed by detecting the movement of an image from an image signal, and using the signal for which the degradation of resolution due to the movement of the image is compensated.

A focus detection apparatus of this example will be described in detail with reference to the drawings.

Fig. 10 is a block diagram showing a third example in which a movement detection device of the present invention is applied to the focus detection apparatus.

50 In the same figure, 101 is an object, 102 is a pick-up lens, and 103 is a pick-up element or pick-up tube such as CCD for outputting a pick-up signal by photoelectrically converting an object image formed on a pick-up plane by the pick-up lens 2. 104 is an amplifier for amplifying the pick-up signal output from the pick-up element 3 to a predetermined level, 105 is an A/D converter for converting an input analog pick-up signal to the digital signal, 106 is a movement vector operation circuit for obtaining the movement vector of image from the image signal which has been converted to the digital signal by the A/D converter 105, 107 is an x-axis projection circuit for projecting the movement vector on the x-axis that is a horizontal direction of screen, and 108 is an x component of the movement vector.

109 is an edge detection circuit for detecting the width of edge portion for an object image, 110 is an edge

width detection circuit for detecting the width of edge portion detected by the edge detection circuit 9, and 111 is an edge width signal.

112 is a comparator, and 113 is a memory. 114 is a lens control circuit, 115 is an lens control signal, and 116 is a lens driving circuit for moving the pick-up lens 102 in a direction of optical axis to adjust the focus.

On the other hand, 117 is a video signal processing circuit for outputting a standard television signal on television camera by performing the signal processing such as the gamma correction or various filtering to the pick-up signal output from the A/D converter 105, 118 is a D/A converter for converting the digital signal output by the video signal processing circuit 117 to the analog signal, and 119 is a synchronism signal adding circuit for adding a synchronism signal to the image signal output from the D/A converter 118, and 120 is an output video signal.

With the above constitution, the pick-up lens 102 forms an image of object 101 on the pick-up plane of pick-up element 103, and the pick-up element 103 converts photoelectrically the image of object to output an image signal. The image formed on the pick-up element 103 involves the movement owing to the movement of the pick-up lens 102, pick-up element 103 or object 101.

The image signal output from the pick-up element 103 is amplified by the amplifier 104, and converted to the digital signal by the A/D converter 105.

A part of the digitized image signal is input into the movement vector operation circuit 106. The movement vector operation circuit 106 contains a frame memory where image of previous frame is stored, and in which the movement vector of image is calculated by comparing the image of current frame with that of previous frame stored in the frame memory. Exemplary of the method of operating the movement vector is that used in as a so-called representative point matching method or gradient method can be used.

The x-axis projection circuit 107 gives an x-axis component signal 108 from the movement vector obtained by the movement vector operation circuit 106.

The digitized image signal is sent to an edge portion detection circuit 109. The edge portion detection circuit 109 detects an edge portion from the information such as a slope for the image signal, and selects an edge having the largest slope with respect to the x-axis, for example, as the edge for judgement of the focusing. The edge width operation circuit 110 calculates the width of edge from a density difference of edge and a slope of edge, as above described, and output it as an edge width signal 111. The edge width signal 111 is subtracted from the x-axis component signal 108 of movement vector and then sent to the comparator 112. The signal sent to the comparator 112 is an edge width signal with the movement of image corrected. And the comparator 112 compares the input corrected edge width signal with data within the memory 113.

Within the memory 113, the corrected edge width signal in previous field or frame is stored.

The comparator 112 sends a control signal to the lens control circuit, as well as writing a smaller edge width signal of two corrected edge width signals into the memory 113.

The control signal is one in which driving of the current pick-up lens 102 is continued in the same direction when a newly input edge width signal is smaller than the previous edge width signal, or driving is performed in a reverse direction when it is larger than the previous edge width signal. Also, it may be permitted to send a signal in which the amount of driving the lens is gradually changed depending on the amount of variation in the corrected edge signal. Or when the amount of variation is quite small, a control signal for stopping the amount of driving the lens can be sent by deciding the focusing state if the amount of variation is changed from negative to positive. In order to make the fine control, it is desirable that the corrected edge signals as much as several frames should be stored in the memory 113.

The lens control circuit 114 issues a lens driving signal 115, based on a control signal sent from the comparator 112, in accordance with which the lens driving circuit 116 drives the pick-up lens 102.

On the other hand, the digitized image signal is input into the video signal processing circuit 117, then input into the D/A converter 118 for conversion into the analog signal, has a synchronism signal added in the synchronism signal adding circuit 119, and output as a video signal.

Fig. 11 is a view showing schematically the movement of image, like in Fig. 2.

In this figure, 121 is an output screen. For example, a monitor display screen can be assumed. Like in Fig. 2, 112 is a previous image, and 123 is a current image. 124 is a movement vector when the previous image 122 moves to the current image 123. 125 is a projection vector of the movement vector 124 onto the x-axis.

In the output screen 121, a video signal 120 of Fig. 10 is displayed.

For example, an image displayed with trembling of hand or panning shows the movement from previous image 122 to current image 123 when time has passed from one clock to another even if the object 101 is a stationary object.

Accordingly, the movement vector 124 is operated in the movement vector operation circuit 106, and the projection vector 125 is calculated in the x-axis projection circuit and output as an x-axis signal component 108.

Here, as the current image 123 involves the movement, the value of each pixel is integrated in the direction

of movement vector 124. Accordingly, in practice, current image 123 as shown in Fig. 11 only shows approximately a gravitational center position of sides of each pattern.

Fig. 12 is a front view showing the movement of optical system. In the same figure, 131 is one cell when the pick-up element is a solid pick-up element such as CCD.

For the convenience of explanation, it is assumed that the movement direction of image coincides with the array direction of one cell in the pick-up element 103. The pick-up element 103 converts a pattern of optical image thereon photoelectrically during a predetermined period of exposure. 132 is an optical image at the start of exposure, and 133 is an optical image at the termination of exposure. The optical image 132 at the start of exposure has been moved to the optical image 133 at the termination of exposure because image moves during exposure like in Fig. 11. The movement vector 124 as shown in Fig. 12 indicates the movement between the optical image 132 at the start of exposure and the optical image 133 at the termination of exposure. This is almost the same as in Fig. 11, but more strictly, slightly different.

That is, the movement vector as shown in Fig. 11 is one taken at nearly intermediate times of respective exposure periods for two images. On the contrary, the movement vector as shown in Fig. 12 is one taken for an image of interest from the start of exposure to the termination of exposure.

Accordingly, when the amount of image movement changes abruptly, both the movement vectors may have different values. Generally, both values can be almost the same, but the movement vector 24 can be used after slight correction, because the movement vector 124 obtained from the movement vector operation circuit 106 is as shown in Fig. 11.

Fig. 13 is a characteristic graph showing a point image distribution function with the movement of image. The form of function is the same as the example of Fig. 4. 141 is a point image distribution function. Here, it is assumed that the length of projection vector 125 is c . Then, the line generated by one point of object 102 moves during exposure period, approximately following the point image distribution function 141. Representing that function as $h(x)$ which can be represented as previously shown in the expression (1),

$$h(x) = \text{Rect}(x/c) \quad (8)$$

The pick-up image becomes unfocused in accordance with the expression (1), due to its movement as well as the out-of-focus state.

Fig. 14 is a characteristic graph showing the correction of edge width.

151 is an image signal of edge portion, with its intensity distribution being $I(x)$. This corresponds to a signal directly obtained from the pick-up element 103. 152 is an intensity distribution of edge portion when image does not contain any movement, its intensity distribution being $I'(x)$. The dullness of the edge for $I'(x)$ can be determined by the shape of an original object and the amount of out-of-focus.

The image signal 151 for edge portion is an image signal of portion selected in the edge portion detection circuit 109. The edge width operation circuit 110 operates the width of edge 1 from a density difference of edge d and a slope $dl(x)/dx$, such that

$$\ell = d/(dl(x)/dx) \quad (9)$$

However, ℓ contains the amount of unfocus due to the movement of image.

Between $I(x)$ and $I'(x)$, the following relation stands.

$$I(x) = I'(x) * h(x) \quad (10)$$

Here, $*$ represents the convolution operation.

$h(x)$ is a function of width c as shown in Fig. 13, in which $I(x)$ has an edge slope portion widened by about $c/2$ to the right and left, compared with $I'(x)$, as shown in Fig. 14. Accordingly, assuming the width of edge for $I'(x)$ as ℓ' , the following expression approximately stands.

$$\ell = \ell' + c \quad (11)$$

The width of edge 1 directly obtained from the image signal 151 of edge portion contains the size c of projection vector 125, thus having a larger value than originally obtained, and may vary in accordance with the movement of image. In the expression (11), by subtracting c from ℓ , it is clear that ℓ' can be obtained, and is not subject to the influence of the movement of image by judging the focusing based on ℓ' .

That is, as shown in Fig. 10, by subtracting an x-axis signal component 108 having the value of c from an edge width signal 111 having the value of ℓ , ℓ' is obtained, and then input into the comparator for use as a signal for judging the focusing, so that the detection of focusing can be made without influence of the movement of image.

In the explanation given herein, by considering that the intensity distribution of edge portion is obtained along the x-axis, the movement vector is also projected onto the x-axis. As the movement vector 24 is obtained in the form of representation with x-axis and y-axis components, the processing for the x-axis projection is practically unnecessary. But if the intensity distribution of edge portion is obtained in a horizontal axis, i.e., other than x-axis, for example, in the steepest direction of edge portion of interest, so as to operate the width of edge, the projection of movement vector is necessary. The size of projection vector can be obtained in a simple man-

ner as a value of inner product between a unit vector in its direction and the movement vector.

Fig. 15 is a block diagram showing a fourth example of focus detection apparatus according to the present invention.

In the same figure, 161 is a frame memory, and 162 is a filter. 163 is a parameter setting circuit for supplying parameters to the filter 162. 164 is an image signal filtered.

In this example, the signal read from the pick-up element 103 is passed to the filtering processing based on the movement vector, to perform the focus detection from that signal.

Like in the third embodiment, the digitized image signal is output from the A/D converter 105. The frame memory 161 stores this signal temporarily.

The digitized image signal is also sent to the movement vector operation circuit 106, where the movement vector 124 is operated. The frame memory 161 acts as a delay element for synchronizing the image signal to terminate the operation of movement vector 124.

The signal read from the frame memory 161 is sent to the filter 162, where the filtering processing is performed. The frequency characteristic of filter 162 is set by the parameter setting circuit 163, where the parameters are given to the filter 162 so as to correct unfocused image due to the movement from the operation result of movement vector 124.

The image signal 164 filtered is sent to the edge portion detection circuit 109, where like in the first embodiment, the edge portion is selected, and after that portion, the focusing judgment operation is performed to drive the pick-up lens 102.

On the other hand, the image signal 164 filtered is sent to the video signal processing circuit 117, where like in the third embodiment, it is finally output as an output video signal 120.

The principle of this example will be described below.

Let the size of movement vector 124 be a' , and let the spatial coordinate along the movement direction be x' . The point image distribution function $h'(x')$ generated by the movement vector 24 is given by, in accordance with the previous expression (1),

$$h'(x') = \text{Rect}(x'/a) \quad (12)$$

The degradation of image can be corrected by the filtering.

The filter for the filtering can use the characteristic as shown in Figs. 4B and 4C in the first example. Explaining this using Figs. 4B and 4C, 42 is a frequency characteristic showing the degradation of image with the movement, and can be represented by the previous expression (2).

Accordingly, the frequency characteristic of inverse filter for compensating for the degradation of image as above described is as shown by 43 in Fig. 4C. That is, $H(f) \cdot P(f) = 1$, in which the filtering with $P(f)$ allows the compensation for the degradation of image with $H(f)$.

By filtering with that filter in the filter 162 in Fig. 15, the resolution of output video signal 120 is increased, so that excellent image can be obtained. However, in this embodiment, the inverse filter can be achieved only approximately, because it becomes infinite at the frequency where $H(f)$ is zero. The range of frequency can be a range where the frequency spectrum for image signal exists.

As clearly seen from Figs. 4A and 4C, expressions (2) and (3), the characteristic of degradation $H(f)$ and the characteristic of compensation filter $P(f)$ contain the size a of movement vector 24 as the parameter. The x' -axis and f -axis are taken along the direction of movement vector 124, respectively, and $P(f)$ depends on the size and direction of movement vector 124.

Accordingly, it is desirable that the filter 162 changes adaptively the filter in accordance with the movement vector 124.

In order to perform the filtering processing in the filter 162, there are two methods like in the previous first embodiment. One of them is the filtering on the axis of frequency, in which the Fourier transform is taken of the image signal read out from the frame memory 161 with FFT (Fast Fourier Transform), which is then multiplied by the inverse filter $P(f)$, and the inverse Fourier transform is taken, so that filtered image signal is obtained.

Another method is the filtering on the axis of time, performed in such a way that the impulse response is obtained by the inverse Fourier transform of inverse filter $P(f)$, and convoluted to image signal from the frame memory 6 so that filtered output can be obtained.

As regards the constitution of filter and the filtering processing used herein, the inverse filter and Wiener filter can be used, as described using expressions (10), (11) and Figs. 5, 6 in the previous first embodiment, and the explanation of analysis is omitted. With the filtering, the degradation of image, i.e., the degradation of resolution, can be compensated, so that the excellent focus detection can be made.

Also, in the filter 162, other various filters are used. As the frequency characteristic 43 has a characteristic of low-pass filter, the filter characteristic of filter 162 has generally a characteristic of high-pass filter or band-pass filter.

As edge portion of edge signal 164 in the image signal 164 filtered is represented as a signal analogous to that as shown in Fig. 14. That is, before filtering, it is like the image signal 151 of edge portion, but after filtering, it becomes the intensity distribution 152 when there is no movement of image.

Accordingly, by operating an edge signal width from the image signal 164 filtered and using it for judgment of the focusing, stable detection of focus can be performed without almost any influence of image movement. Also in this case, the value of edge width obtained is smaller than if the edge width is operated without taking into consideration the movement of image.

Also, in this embodiment, there is a feature that the output video signal 120 itself can provide an excellent and high-quality image with high resolution.

When the whole screen does not move and an object is moving, by dividing the area, portions having common movements can be subjected to the processing based on the same movement vector.

It is note that for the detection of image movement, the method of operating the image signal was described, but when the service condition of pick-up device is much subject to the vibration, and provided with a vibration-proofing apparatus, the movement vector signal can be obtained from an angular sensor or acceleration sensor of vibration-proof apparatus. In this case, it is not simple to deal with the movement of object, but when the movement of whole screen is predominant due to the vibration, a desired movement vector can be obtained and the excellent focus detection can be made.

As above described, with the focus detection apparatus according to the present invention, the focus detection can be performed by detecting a signal component varying with the focusing state from the pick-up signal, wherein movement correction means is provided for detecting and correcting the movement of image, and particularly, the focus detection is made based on a signal component having the movement corrected by said movement detection means, so that it is possible to prevent the degradation of accuracy in the focus detection means caused by the decrease of signal depending on the focusing state, such as the dullness at edge portion or the decrease of high frequency component due to the movement of image, whereby a stable focus detection apparatus with high precision can be provided at all times in which it is not subject to the influence of camera vibration or the movement of object.

Claims

1. A movement detection device for detecting movement of an image and compensating for the movement of the image, comprising:
 - (A) movement detection means for detecting the movement of the image;
 - (B) correction means for correcting the movement of the image based on an output of said detection means; and
 - (C) filter means for performing a filter processing compensating for degradation of resolution due to the movement of said image.
2. A movement detecting device according to claim 1, wherein a characteristic of said filter portion is constituted to be adaptively determined in accordance with the movement of said image.
3. A movement detection device according to claim 2, wherein said filter means is an inverse filter having a frequency characteristic for correcting a frequency characteristic of the movement of image.
4. A movement detection device according to claim 2, wherein said filter means is a Wiener filter.
5. A movement detection device according to claim 2, wherein said movement detection means detects a movement vector of image from the pick-up signal.
6. A movement detection device according to claim 5, wherein said movement detection means changes the filter characteristic adaptively in accordance with the movement vector detected.
7. A movement detection device according to claim 1, further comprising movement correction means for correcting the movement of the image based on the output of said movement detection means.
8. A movement detection device according to claim 7, wherein said movement correction means corrects the movement of the image by changing an image memory and an address for reading an image from said image memory based on the amount and direction of image movement.

9. A movement detection device according to claim 8, wherein said filter means is provided on the output side of said image memory.
10. A movement detection device comprising:
 - 5 (A) image pick-up means;
 - (B) movement vector detection means for detecting a movement vector of an image among said image pick-up signal;
 - (C) filter means for filtering said image pick-up signal; and
 - 10 (D) correction means for correcting degradation of resolution caused by the movement of said image by changing a frequency characteristic of said filter means, based on the movement vector output by said movement vector detection means.
11. A movement detection device according to claim 10, wherein said filter means has the frequency characteristic for compensating for the frequency characteristic of the image movement.
12. A movement detection device according to claim 11, wherein said filter means is an inverse filter of inverse polarity to the frequency characteristic of said image movement.
13. A movement detection device according to claim 11, wherein said filter means is the Wiener filter.
14. A movement detection device according to claim 10, further comprising an image memory and image movement correction means for offsetting the movement of image by changing a read address for reading an image from said image memory in accordance with the movement vector of said image.
15. A movement detection device comprising:
 - 25 (A) movement detection means for detecting movement of an image within a screen;
 - (B) movement correction means for correcting the movement of the image based on an output of said movement detection means;
 - 30 (C) filter means for performing a filter processing compensating for the degradation of resolution due to the movement of said image, based on the output of said movement detection means; and
 - (D) filter control means for controlling an operation of said filter means, based on a decision result that a moving area and a stationary area within the screen are decided based on the output of said movement detection means.
16. A movement detection device according to claim 15, wherein said filter control means operates said filter means in the moving area within the screen, based on the output of said movement detection means.
17. A movement detection device according to claim 16, wherein the characteristic of said filter portion is constituted to be adaptively determined in accordance with the movement of said image.
18. A movement detection device according to claim 15, wherein said filter means is an inverse filter having a frequency characteristic for correcting a frequency characteristic of the movement of image.
19. A movement detection device according to claim 15, wherein said filter means is a Wiener filter.
20. A focus detection apparatus for detecting the focus from an image pick-up signal, comprising:
 - 45 (A) movement detection means for detecting movement of an image from said image pick-up signal;
 - (B) movement correction means for correcting the movement of said image based on the output of said movement detection means; and
 - 50 (C) focus detection means for performing focus detection by extracting a signal component varying with a focusing state from said image pick-up signal having a movement component of an image corrected by said movement correction means.
21. A focus detection apparatus according to claim 20, wherein said focus detection means judges focusing when the width of an edge portion is minimum by detecting information for the width of the edge portion of the image from said image pick-up signal.
22. A focus detection apparatus according to claim 20, wherein said movement detection means detects the

movement vector of image from said image pick-up signal.

23. A focus detection apparatus according to claim 21, further comprising focus adjustment means for adjusting the focusing state of an image pick-up lens based on an output of said focus detection means.
24. A focus adjustment device comprising:
 - (A) image pick-up means;
 - (B) movement detection means for detecting movement of an image from said image pick-up signal output from said image pick-up means;
 - (C) filter means for performing a filtering processing compensating for degradation of resolution due to the movement of said image; and
 - (D) focus detection means for performing focus detection based on the image pick-up signal compensated by said filter means.
25. A focus adjustment device according to claim 24, further comprising filter control means for changing a characteristic of filter means, based on an output of said movement detection means.
26. A focus adjustment device according to claim 24, wherein said focus detection means detects the focus by detecting information for the width of an edge for an image from said image pick-up signal.
27. A focus adjustment device according to claim 24, wherein said filter means has a frequency characteristic of reverse polarity to a frequency characteristic of said image movement.
28. A focus adjustment device according to claim 25, wherein said focus detection means detects the focus by detecting information for the width of an edge for an image from said image pick-up signal.
29. An image processing method or apparatus in which a received image is processed to compensate for movement of it and is also processed to increase its resolution.
30. An image processing method or apparatus for processing an image received in image fields, in which the received image is processed to compensate for movement of the image from field to field and is also processed to compensate for movement of the image during a field period.
31. An image processing method or apparatus in which a received image is processed to compensate for movement of it or to determine movement amount information, and an auto-focus operation is carried out taking into account the result of the said processing.

FIG. 1

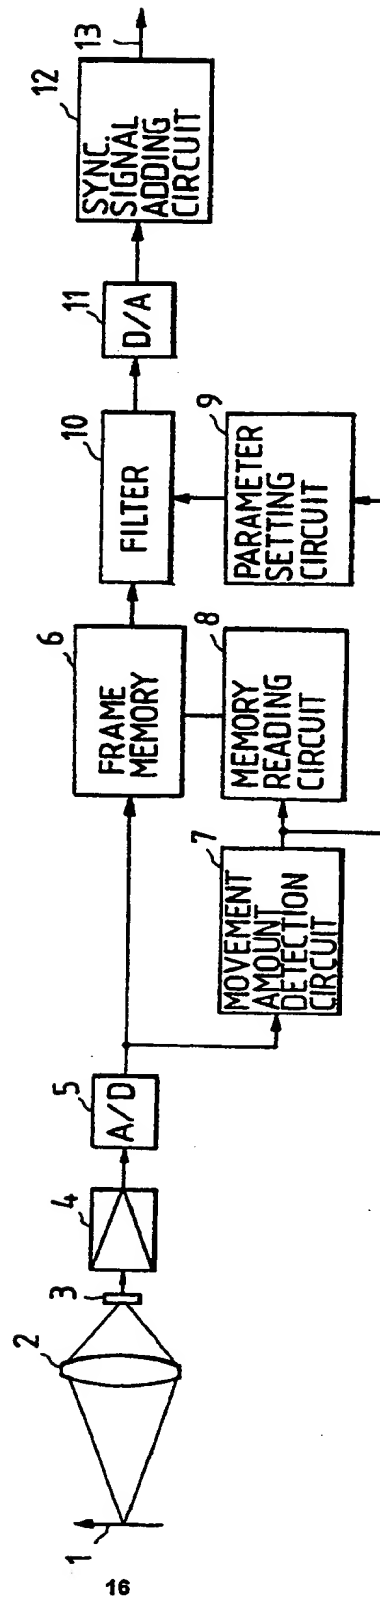


FIG. 2

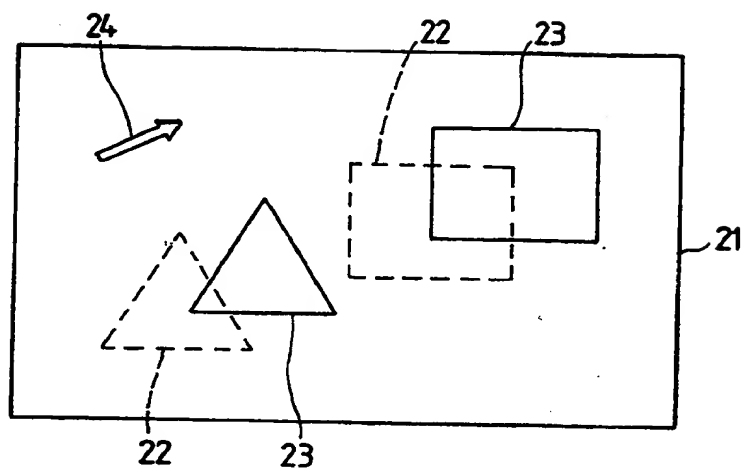


FIG. 3

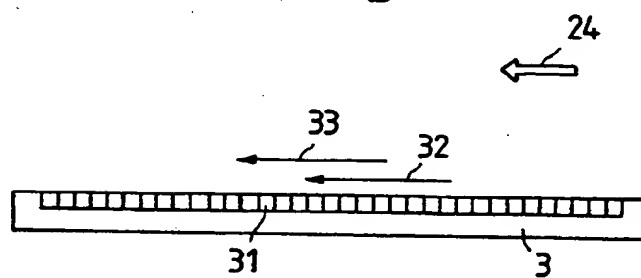


FIG. 4A

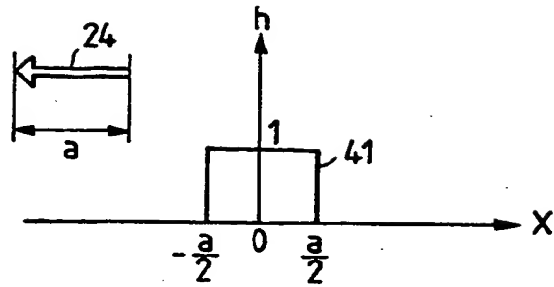


FIG. 4B

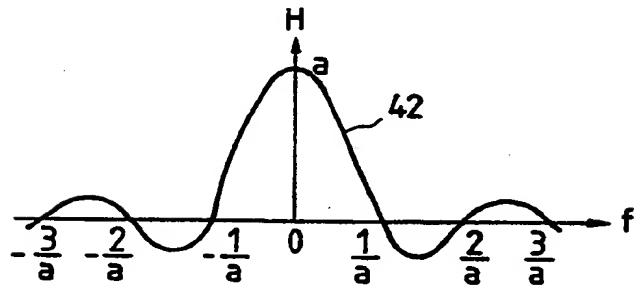


FIG. 4C

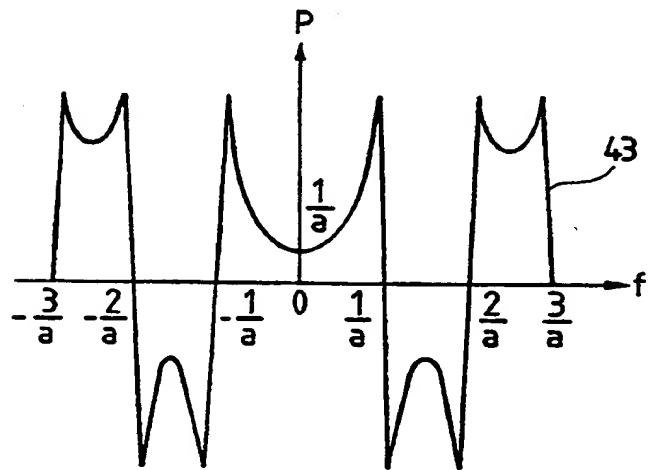


FIG. 5

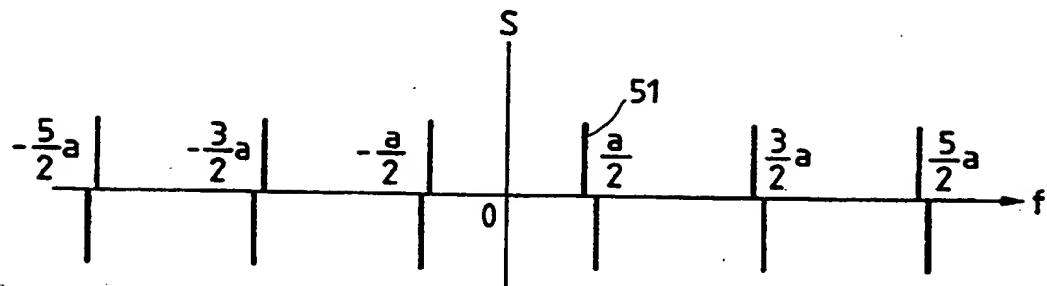


FIG. 6

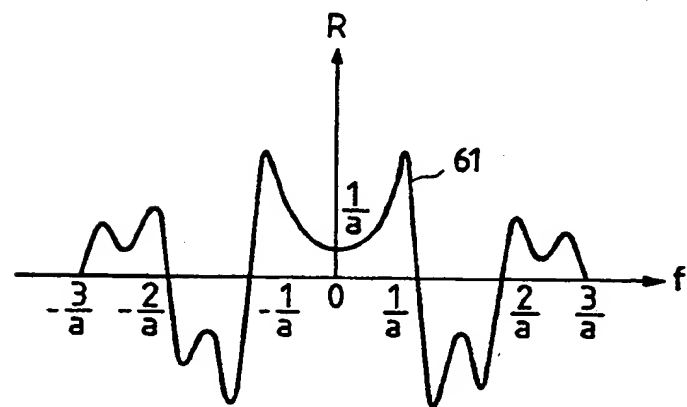


FIG. 7

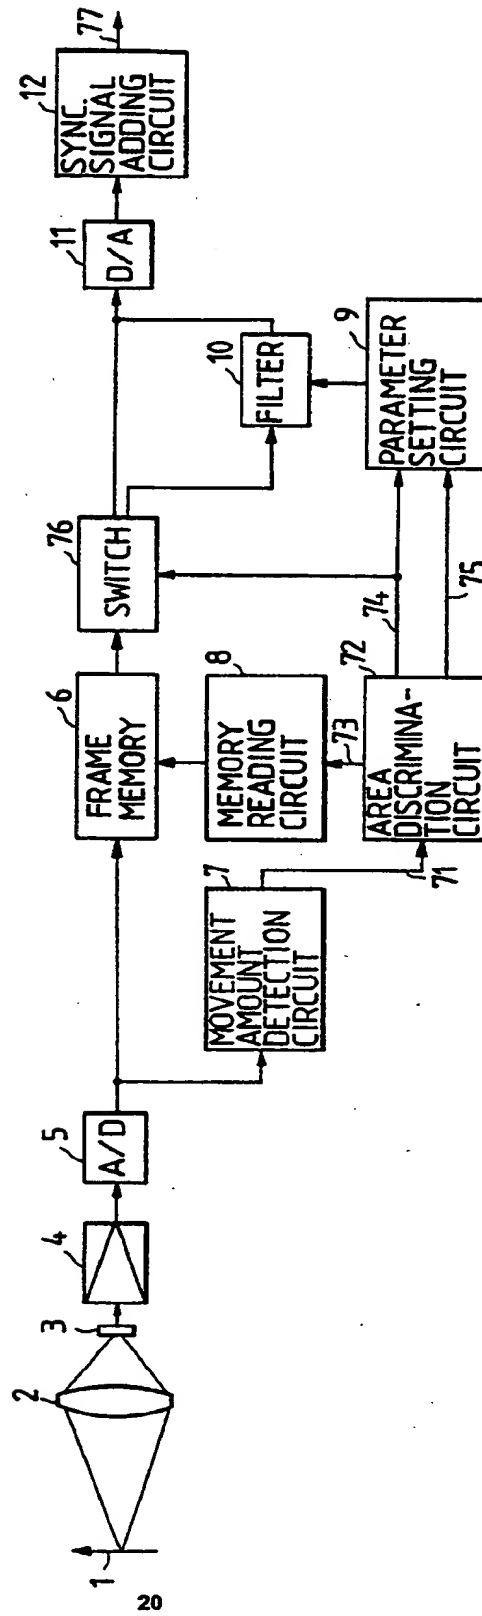


FIG. 8

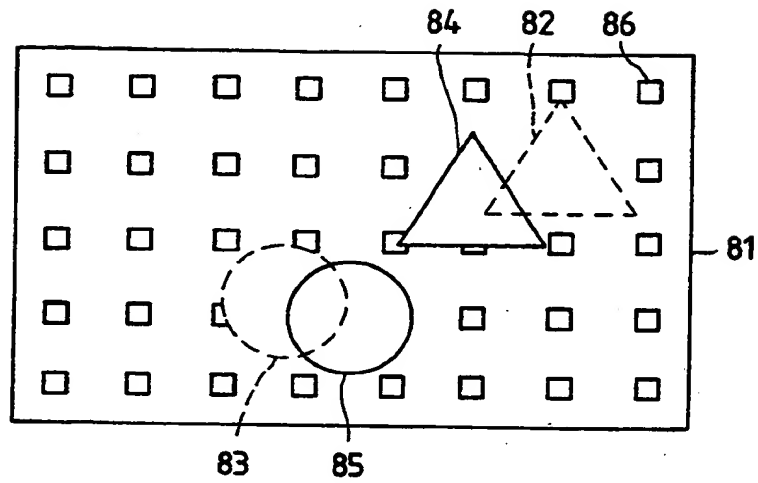


FIG. 9

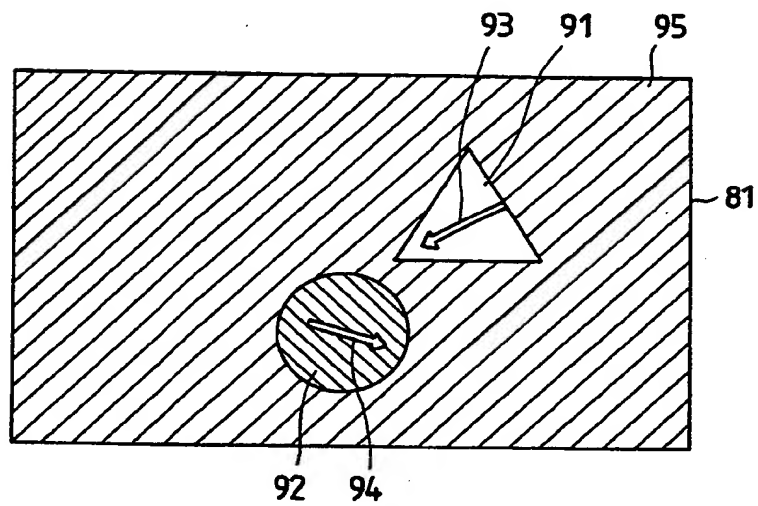


FIG. 10

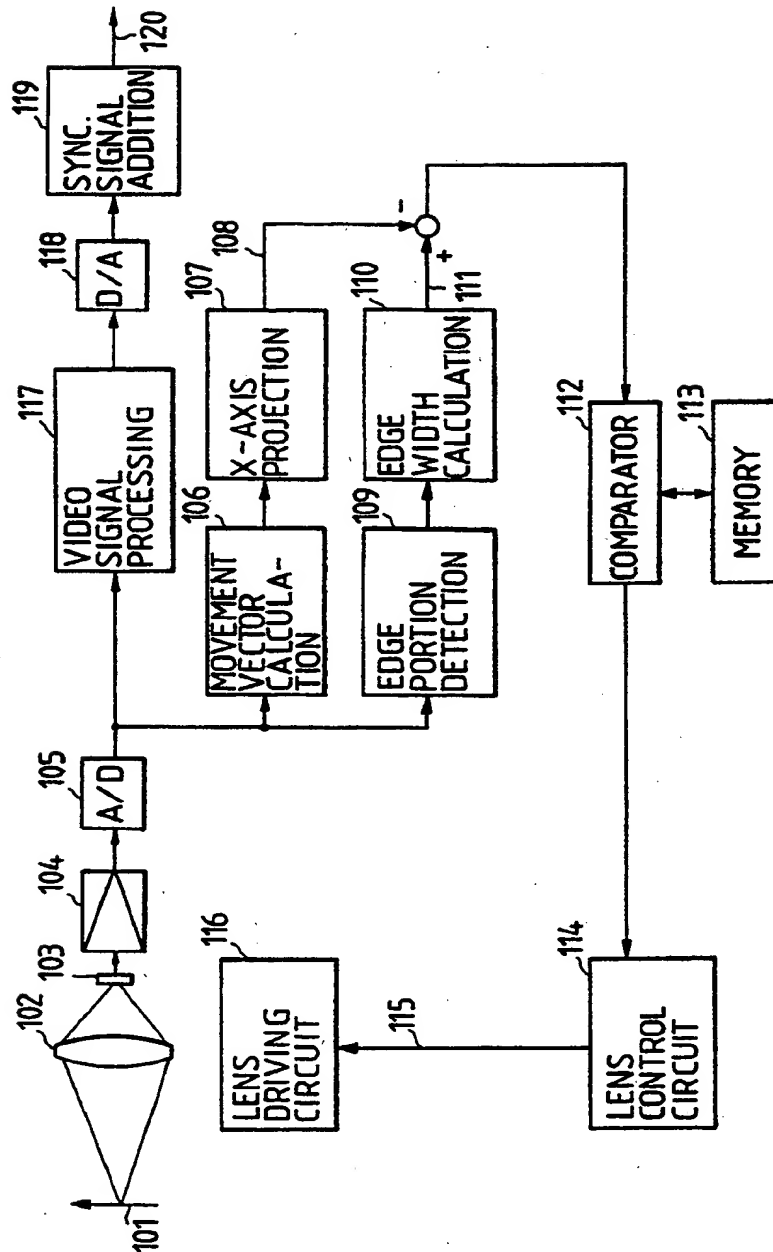


FIG. 11

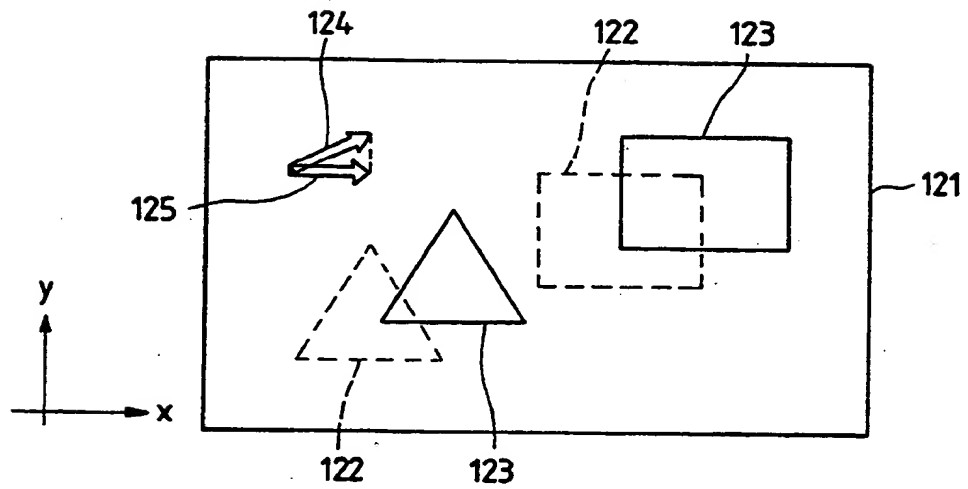


FIG. 12

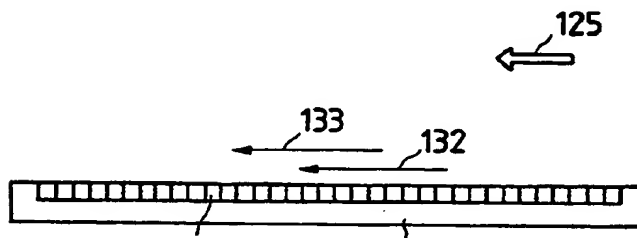


FIG. 13

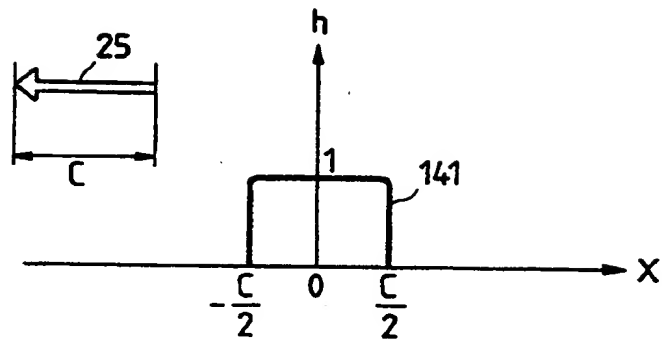


FIG. 14

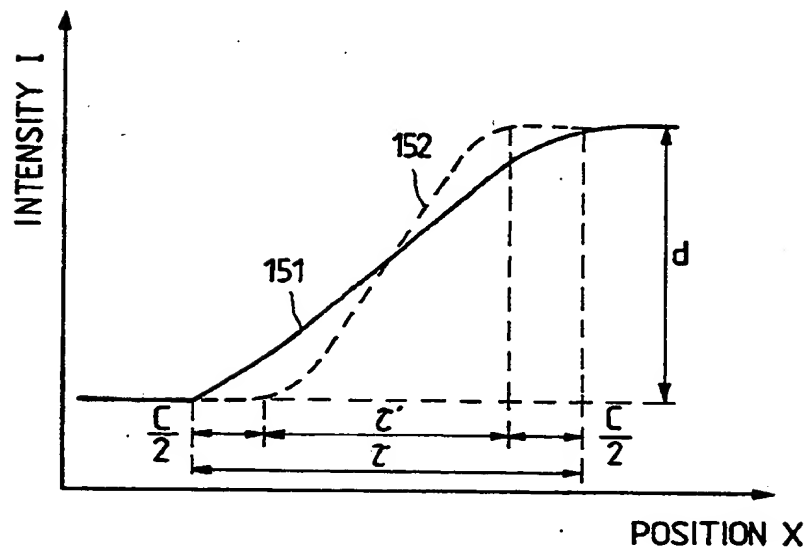


FIG. 15

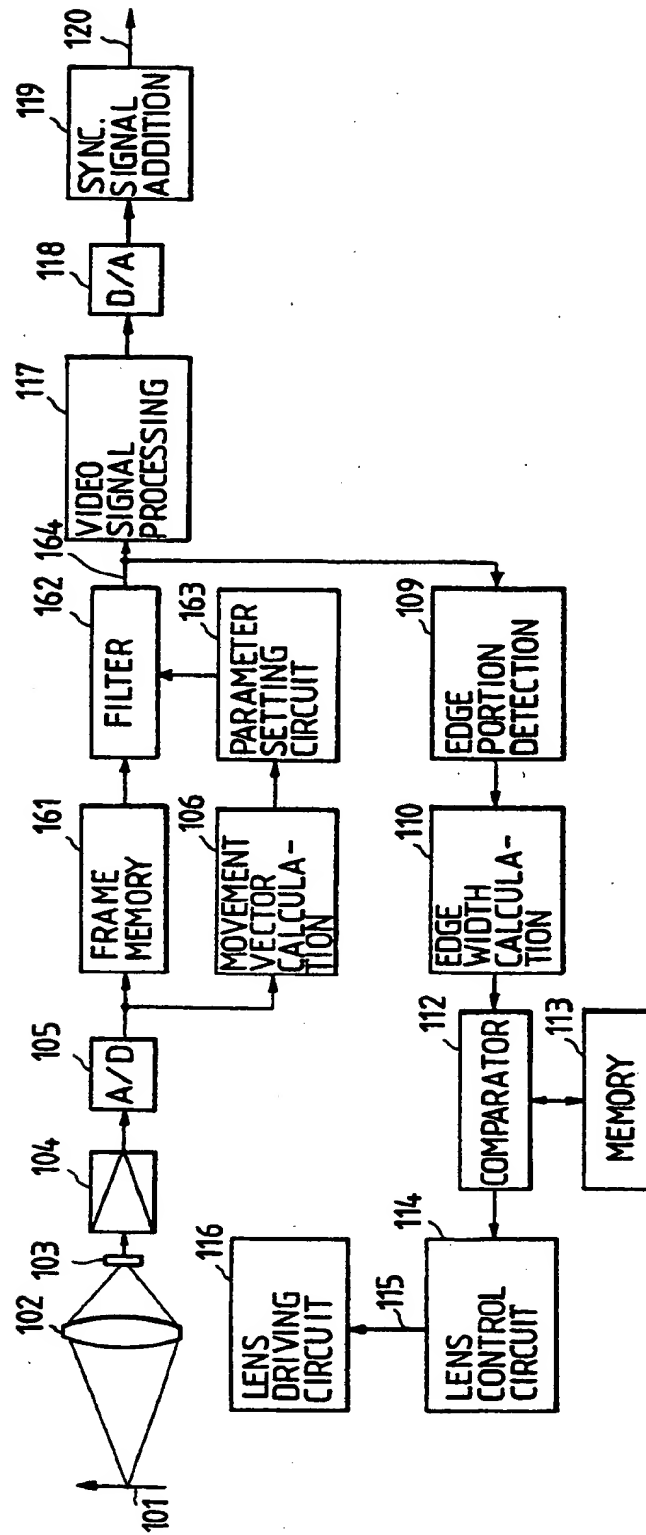


FIG. 16A


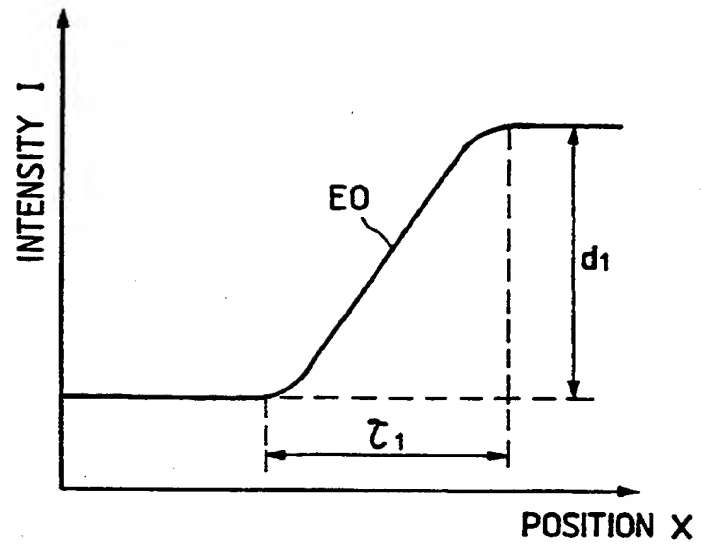


FIG. 16B



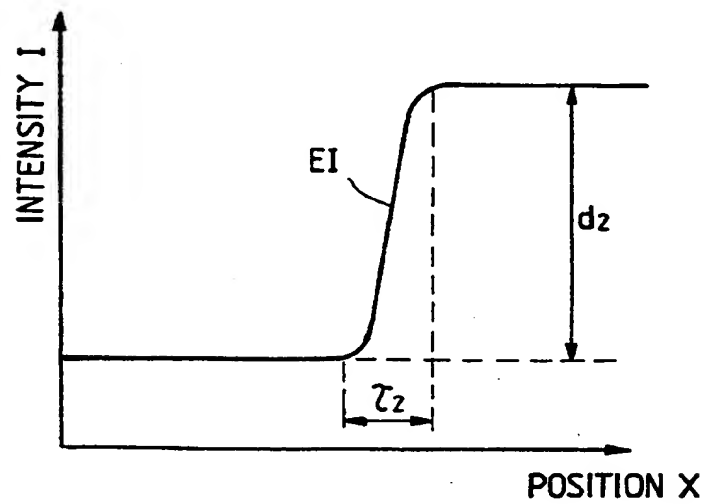

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 91 30 3847

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
Y	PATENT ABSTRACTS OF JAPAN vol. 12, no. 430 (E-682), 14 November 1988; & JP - A - 63166370 (TOSHIBA CORP.) 09.07.1988 * whole document *	1-8,10-19	H 04 N 5/335 H 04 N 5/232 G 02 B 27/64
A	idem ----	20-29	
Y	US-A-4 612 575 (ISHMAN et al.) * column 3, line 23 - column 4, line 52; figure 2 *	1-8,10-19	
A	-----	20-28	
A	DE-A-3 243 486 (DORNER) * page 4, last paragraph - page 5, first paragraph; figure *	1,10,14,15,20,29-31	
A	PATENT ABSTRACTS OF JAPAN vol. 13, no. 522 (E-849), 21 November 1989; & JP - A - 1212077 (OLYMPUS OPTICAL) 25.08.1989 * whole document *	1,2,6,10-12,15-17	
A	EP-A-0 358 196 (CANON K.K.) * column 2, line 22 - column 3, line 51; figures 8,10 *	1,5,15,16	
P,X	EP-A-0 366 136 (CANON K.K.) * page 4, line 16 - page 5, line 25 *	20,22,23,31	
P,A	-----	24	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 09-07-1991	Examiner VON MOERS F
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons</p> <p>& : member of the same patent family, corresponding document</p>			

EPD FORM 150 (1.1) (P040)